

HALO UP-DOWN DARK

GENERAL

HALO UP-DOWN DARK
 Category: wall
 Light source: LED
 Color changing: no
 Warranty: 5 years

DIMENSIONS

Length: 4.53" / 115 mm
 Width: 3.94" / 100 mm
 Height: 4.72" / 120 mm
 Diameter: 3.94" / 100 mm
 Total height: -
 Recess depth: -

ELECTRONICS

Voltage: 12V AC
 Output: 6.50 Watt
 VA: 10.00
 Power factor: 0.65
 Light source: 2x LED High Power 3.5W
 Lifetime: 25000 hours
 Energy label: A
 Dimmable: no
 Length of cable lead: 24" / 600 mm

LIGHT SPECIFICATIONS

Color temperature: 3000 K
 CRI (RA): 92
 Luminous intensity: 98.90 Cd
 Light beam 0-180: 85°
 Light beam 90-270: 85°
 Net luminous flux: 361 lumen
 Luminous efficacy: 56 lumenwatt

MATERIAL

Ring Plate: -
 Lens: polycarbonate
 Exterior: aluminum
 Easy Lock included: yes
 Installation hardware included: yes

AVAILABLE PRODUCT COLORS

■ Dark



AVAILABLE ACCESSORIES

LENS DIFFUSE, SHUTTER 1

PROTECTION RATING

IP : 55

Distance		Light circle 0-180°		Light circle 90-270°		Illuminance
[m]	[ft]	[m]	[ft]	[m]	[ft]	[lux]
1	3.28	1.83	6.01	1.83	6.01	98.80
1.5	4.92	2.75	9.02	2.75	9.02	43.91
2	6.56	3.67	12.03	3.67	12.03	24.70
2.5	8.20	4.58	15.03	4.58	15.03	15.81
3	9.84	5.50	18.04	5.50	18.04	10.98
3.5	11.48	6.41	21.04	6.41	21.04	8.07
1	3.28	1.83	6.01	1.83	6.01	98.80

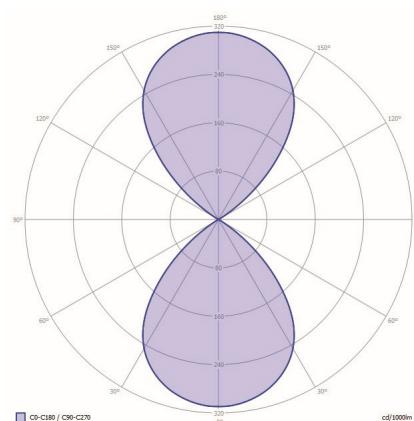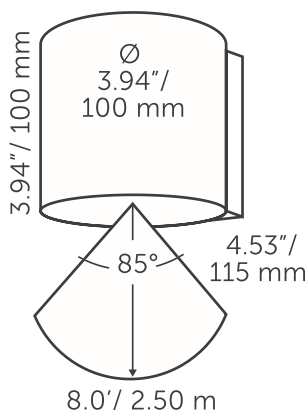

in-lite®

12 volt

