

OUTDOOR LIGHTING

HALO UP-DOWN DARK 100-230V

GENERAL

HALO UP-DOWN DARK 100-230V
Category: wall
Light source: LED
Color changing: no
Warranty: 5 years

DIMENSIONS

Length: 5.12" / 130 mm
Width: 5.12" / 130 mm
Height: 3.94" / 100 mm
Diameter: 5.12" / 130 mm
Total height: -
Recess depth: -

ELECTRONICS

Voltage: 100-230 V AC
Output: 8.50 Watt
VA: 20.00
Power factor: 0.43
Light source: 2x LED High Power 3.5W
Lifetime: 25000 hours
Energy label: A
Dimmable: no
Length of cable lead: 24" / 600 mm

LIGHT SPECIFICATIONS

Color temperature: 3000 K
CRI (RA): 93
Luminous intensity: 112.20 Cd
Light beam 0-180: 85°
Light beam 90-270: 85°
Net luminous flux: 367 lumen
Luminous efficacy: 43 lumenwatt

MATERIAL

Ring Plate: -
Lens: polycarbonate
Exterior: aluminum
Easy Lock included: yes
Installation hardware included: yes

AVAILABLE PRODUCT COLORS

■ Dark



AVAILABLE ACCESSORIES

LENS DIFFUSE, SHUTTER 2

PROTECTION RATING

IP : 55

Distance		Light circle 0-180°		Light circle 90-270°		Illuminance [lux]
[m]	[ft]	[m]	[ft]	[m]	[ft]	
1	3.28	1.83	6.01	1.83	6.01	112.20
1.5	4.92	2.75	9.02	2.75	9.02	49.87
2	6.56	3.67	12.03	3.67	12.03	28.05
2.5	8.20	4.58	15.03	4.58	15.03	17.95
3	9.84	5.50	18.04	5.50	18.04	12.47
3.5	11.48	6.41	21.04	6.41	21.04	9.16
1	3.28	1.83	6.01	1.83	6.01	112.20

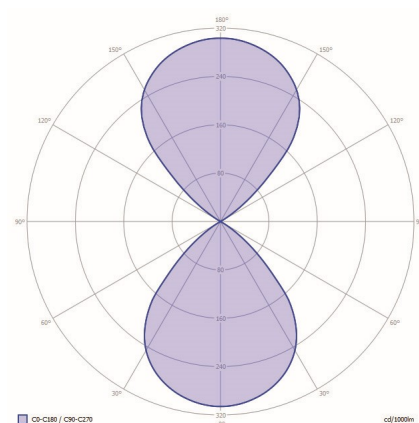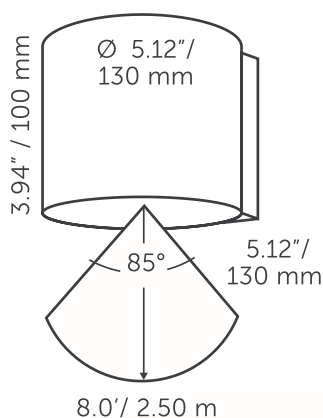

in-lite®

12 volt

