

OUTDOOR LIGHTING

EVO LOW DARK

GENERAL

EVO LOW DARK
 Category: solitary
 Light source: LED
 Color changing: no
 Warranty: 5 years

DIMENSIONS

Length: 4.72" / 120 mm
 Width: 1.97" / 50 mm
 Height: 14.41" / 366 mm
 Diameter: -
 Total height: 25.04" / 636 mm
 Recess depth: -

ELECTRONICS

Voltage: 12V AC
 Output: 2.00 Watt
 VA: 2.10
 Power factor: 0.95
 Light source: 27x SMD-LED 0.6W
 Lifetime: 25000 hours
 Energy label: A
 Dimmable: no
 Luminous efficacy: 50 lumenwatt
 Length of cable lead: 24" / 600 mm

LIGHTSPECIFICATIONS

Color temperature: 2950 K
 CRI (RA): 95
 Luminous intensity: 56.10 Cd
 Light beam 0-180: 57°
 Light beam 90-270: 87°
 Net luminous flux: 79 lumen
 Luminous efficacy: 40 lumenwatt

MATERIAL

Ring Plate: -
 Lens: acrylic (PMMA)
 Exterior: aluminum
 Easy Lock included: yes
 Installation hardware included: yes

AVAILABLE PRODUCT COLORS

■ Dark



AVAILABLE ACCESSORIES

-

PROTECTION RATING

IP : 55

Distance		Light circle 0-180°		Light circle 90-270°		Illuminance
[m]	[ft]	[m]	[ft]	[m]	[ft]	[lux]
1	3.28	1.09	3.56	1.90	6.23	56.10
1.5	4.92	1.63	5.34	2.85	9.34	24.93
2	6.56	2.17	7.13	3.80	12.45	14.03
2.5	8.20	2.71	8.91	4.74	15.57	8.98
3	9.84	3.26	10.69	5.69	18.68	6.23
3.5	11.48	3.80	12.47	6.64	21.79	4.58
1	3.28	1.09	3.56	1.90	6.23	56.10

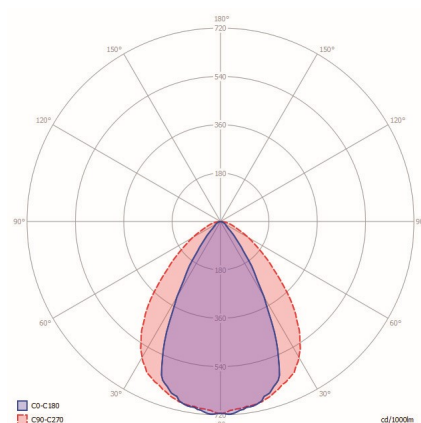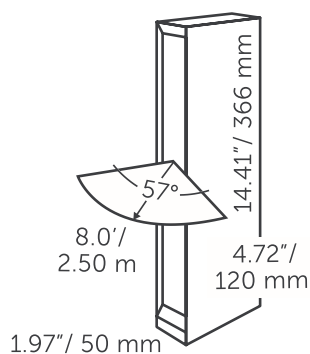

in-lite®

12 volt

